Administration (513) 722-3400

Zoning / Planning (513) 722-3400

Service / Cemetery (513) 722-3400



Police (513) 722-3200

Fire / E.M.S. (513) 722-3500

www.Goshen-OH.gov

Culvert: New Installation/ Replacement Inspection: Driveway Apron/ Sidewalk

[] New Culvert Installation: Fee - \$175.00

The Goshen Township Trustees require the installation of a Driveway Drainage Facility of a size, length, shape and type determined by the Goshen Township Service Director. It is understood that it is the responsibility of the property owner to purchase the culvert pipe to complete the new culvert installation project.

The Goshen Township Service Director will notify the applicant within ten (10) days as to the size, length and type of driveway facility required.

[] Replacement: Fee-\$100.00

It is understood that it is the responsibility of the property owner to purchase the culvert pipe to complete the project replacement of the driveway culvert. The Township will install the culvert tile to assure proper drainage.

The Township requires a 12" x 20' galvanized tile, or double wall plastic, which will be determined by Service Director 20' minimum length. You may go longer if you wish **HOWEVER**, there is an additional \$5.00 charge for each foot beyond the 20' minimum. The Township replaces the gravel, we **DO NOT replace blacktop or concrete**.

Before any concrete driveway apron and or sidewalk attached to apron is poured, the Service

[] Driveway Apron/Sidewalk Inspection: Fee-\$50.00

ector has to inspect the site. Please see attache	d detail for regulations.
Service Director	Date
Applicant's Signature	Date
Method of Payment / Payment Amount	Address:
ana #	

Administration (513) 722-3400

Zoning / Planning (513) 722-3400


Service / Cemetery (513) 722-3400



Police (513) 722-3200

Fire / E.M.S. (513) 722-3500

www.Goshen-OH.gov

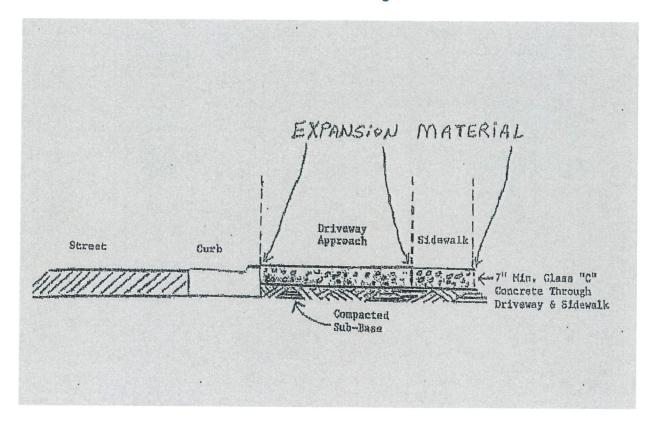

Administration (513) 722-3400

Zoning / Planning (513) 722-3400

Service / Cemetery (513) 722-3400



Police (513) 722-3200 Fire / E.M.S.

(513) 722-3500

www.Goshen-OH.gov

DRIVEWAY APRON INSPECTION SHEET

ADDRESS
DATE INSPECTED
SIZE OF APRON
CONDITION OF CURB AT STREET
CONDITION OF ADJOINING SIDEWALK
INSPECTED BY
COMMENTS

Rules and Regulations for all sidewalk and driveway aprons in Goshen Township:

- 1. Driveway approach within street right-of-way is to be minimum of 7" thick
- 2. Sidewalks that pass through driveway approach will be minimum of 7" thick.
- 3. Sidewalks not passing through driveways are to be a minimum of 5" thick.
- 4. Class "C" concrete is to be used for driveways and sidewalks. (attached detail)