

Administration
(513) 722-3400

Planning / Zoning
(513) 722-3400

Service / Cemetery
(513) 722-3400



Police
(513) 722-3200

Fire / E.M.S.
(513) 722-3500

www.goshen-oh.gov
6757 Goshen Road
Goshen, Ohio 45122

DRIVEWAYS APRON INSPECTION SHEET

ADDRESS _____

DATE INSPECTED _____

SIZE OF APRON _____

CONDITION OF CURB AT STREET _____

CONDITIOION OF ADJOINING SIDEWALK _____

INSPECTED BY _____

COMMENTS _____

Rules and regulations for all sidewalk and driveway aprons in Goshen Township.

1. Driveway approach within street right-of-way is to be a minimum of 7" thick
2. Sidewalks that pass-through driveway approach will be minimum of 7" thick.
3. Sidewalks not passing though driveways are to be a minimum of 5" thick.
4. Class "C" concrete is to be used for driveways and sidewalks
(see attached detail).

Administration
(513) 722-3400

Planning / Zoning
(513) 722-3400


Service / Cemetery
(513) 722-3400



Police
(513) 722-3200

Fire / E.M.S.
(513) 722-3500

www.goshen-oh.gov
6757 Goshen Road
Goshen, Ohio 45122

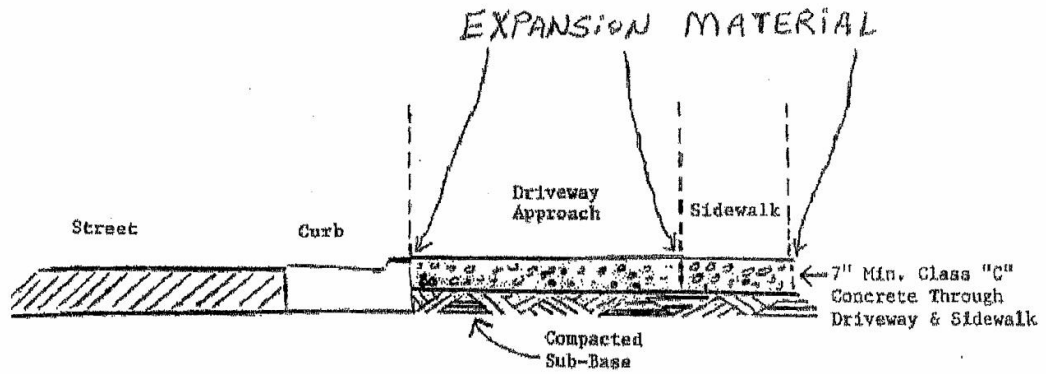

6757 Goshen Road
Goshen, Ohio 45122

Administration
(513) 722-3400

Planning / Zoning
(513) 722-3400

Service / Cemetery
(513) 722-3400



Police
(513) 722-3200

Fire / E.M.S.
(513) 722-3500

www.goshen-oh.gov
6757 Goshen Road
Goshen, Ohio 45122

General Provisions

- (1) Any excavation and opening in the right of way shall be secured with sufficient barricades, signage, caution tape, plywood (cover excavations out of street overnight), approved steel plates (cover excavations in street overnight) and other traffic control devices properly placed warning oncoming traffic of construction. Traffic shall be maintained in accordance with item 614 of the ODOT Construction and Material Specifications and is required by Service Director.
- (2) All necessary precautions shall be taken to protect the public from accidents or damage to persons or property during the duration of project. Each person, or contractor shall be held liable for all damages, including cost incurred by the Township in defending any action brought against it for damages, as well as cost of any appeal, that may result from the neglect by such person or his/her employees of any necessary precautions against injury or damage to person, vehicles or property of any kind.
- (3) Hours of Construction-Work will be restricted to 9:00 a.m. through 3:00 p.m. or after 6:00 p.m. until 6:00 a.m. unless otherwise approved by the Issuing agent.
- (4) Unless otherwise approved, a minimum of one (1) lane of traffic in each direction shall be provided. All efforts must be made by permit holder to insure access to all properties adjacent to the project. If traffic becomes limited to only one (1) lane for both directions of travel, a flagger or temporary traffic control device shall be used in order to maintain proper traffic cycling. Permit holder shall insure best efforts to prevent traffic back up.
- (5) Notices shall be made to the Service Director, and all public and private individuals, firms, and corporations affected by the work to be done at least seven (7) business days before work commences and the Service Director shall be notified twenty-four (24) hours prior to backfill of trench or excavation unless excavation is due to an emergency.
- (6) If and when the project will result in the loss of utility service to private properties of businesses, the owner shall be notified in writing or by personal contact at least twelve (12) hours in advance of the loss of service.
- (7) Adequate drawings or sketches shall be included with application permit showing the existing and or proposed location of the excavation.
- (8) Prior to excavation, the contractor shall first contact OUPS to determine locations of underground utilities. (800-362-2764)
- (9) Pavement Removal shall be saw cut in neat, straight lines. Excavate as small of area as needed. If the pavement is damaged beyond original saw cut lines, contractor must cut back a squared off section far enough to clean up damaged area.
- (10) Excavated material must be piled in a way not to disrupt motor and pedestrian traffic. Curb and gutters shall be kept clean to proceed proper drainage.

**6757 Goshen Road
Goshen, Ohio 45122**

Administration
(513) 722-3400

Planning / Zoning
(513) 722-3400

Service / Cemetery
(513) 722-3400



Police
(513) 722-3200

Fire / E.M.S.
(513) 722-3500

www.goshen-oh.gov
6757 Goshen Road
Goshen, Ohio 45122

- (11) All excavated areas outside of the street must be correctly compacted upon backfilling. All excavations can be subject to testing. Backfilled material not achieving the compaction requirements shall be removed and re-compacted by contractor at contractor cost.
- (12) Trench safety shall be utilized at all times in strict accordance with State and Federal safety standards.
- (13) Joint or Crack seal is required on each street repair and pavement cut made.
- (14) Applicant to restore trench in the roadway per Roadway trench Restoration detail below.
- (15) Right of way work shall be cleaned at the end of each day and be neat and presentable. All catch basins, culverts and storm sewers affected by project dirt, mud, rock and all debris shall be cleaned out to proceed proper drainage.
- (16) Vehicles and equipment set up on sidewalks are forbidden. Any violations will result in immediate shutdown of work and citations.
- (17) Restoration of the right of way is required and shall be completed immediately after excavation and by the termination date on permit.
- (18) If trench restoration does not comply with the specifications of this section, the Township may order the work redone and/or contract out the rework and charge all costs associated with the rework to the permit holder.
- (19) Any replacement of, addition to, or change in the facility granted by this permit shall require a new permit prior to inaction of such work.
- (20) All workmanship and materials used by the Permit Holder, and/or subcontractors, to repair the areas in the right of way shall be subject to the inspection and approval of the Township Service Director and shall be warranted for a period of one(1) year from the date of completion for failure due to workmanship or quality materials.

***Applicants must call Township Service Director at (513)-722-3400 for inspection 24 hours prior to backfill. ***

**6757 Goshen Road
Goshen, Ohio 45122**

Administration
(513) 722-3400

Planning / Zoning
(513) 722-3400

Service / Cemetery
(513) 722-3400




Police
(513) 722-3200

Fire / E.M.S.
(513) 722-3500

www.goshen-oh.gov
6757 Goshen Road
Goshen, Ohio 45122

Roadway Trench Restoration - Apply granular bedding around the pipe. Backfill trench with Flash fill to bottom of the existing asphalt. Apply minimum 5" of 301 asphalt or match existing asphalt cross section. Apply minimum 5" of Item 404 asphalt surface course. Apply the asphalt in such a way that when it is fully compacted, the edges are flush, and the center is 1/4 inch high, for future settlement. Seal all edges of the trench with item 702.17 - Joint Sealer.

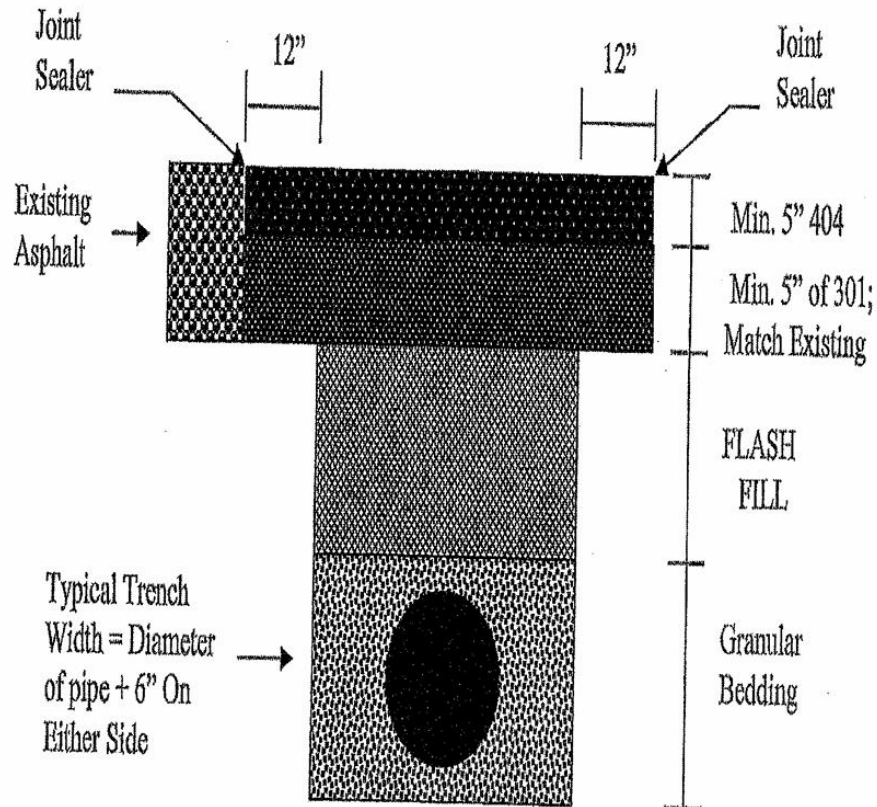

6757 Goshen Road
Goshen, Ohio 45122

Administration
(513) 722-3400

Planning / Zoning
(513) 722-3400

Service / Cemetery
(513) 722-3400



Police
(513) 722-3200

Fire / E.M.S.
(513) 722-3500

www.goshen-oh.gov
6757 Goshen Road
Goshen, Ohio 45122

DATE _____

I, _____ from _____

NAME

COMPANY

Have received and read a copy of the Rules and Regulations for Open Cuts in Goshen Township

SIGNATURE

TITLE

This form must be signed and returned to Goshen Township before permit is issued.

6757 Goshen Road
Goshen, Ohio 45122